

TERRAMETRA

NCEES FS Practice Exam

Terrametra Resources

Lynn Patten




✓ 1. One corner of a 60-ft. × 120-ft. lot, otherwise rectangular, is a curve with a radius of 20 ft. and a central angle of 90°.

 \checkmark The area (ft.²) of the lot is most nearly:

- A. 6,872
- B. 6,886
- C. 7,114
- D. 7,200



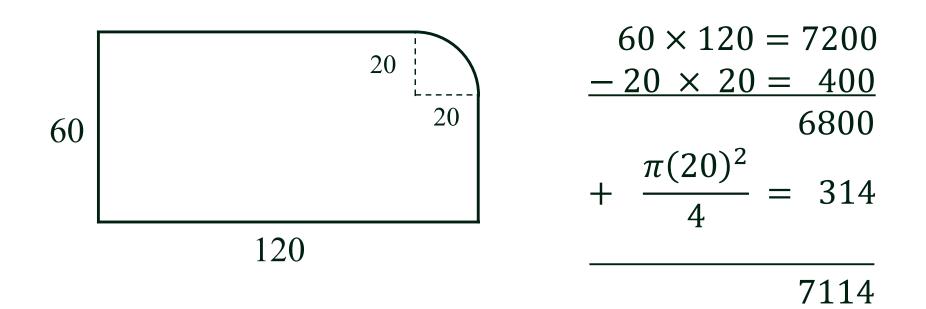



✓ 1. One corner of a 60-ft. × 120-ft. lot, otherwise rectangular, is a curve with a radius of 20 ft. and a central angle of 90°.

 \checkmark The area (ft.²) of the lot is most nearly:

- A. 6,872
- B. 6,886
- C. 7,114
- D. 7,200




✓ 1. One corner of a 60-ft. × 120-ft. lot, otherwise rectangular, is a curve with a radius of 20 ft. and a central angle of 90°.

 \checkmark The area (ft.²) of the lot is most nearly:


- A. 6,872
- B. 6,886
- C. 7,114
- D. 7,200



- 2. A client wants to create a 1-acre parcel by establishing a North-South line, BC, as shown in the figure.
- \checkmark The length (ft.) of Side AB is most nearly:
 - A. 299.96
 B. 352.84
 C. 358.73
 D. 366.20

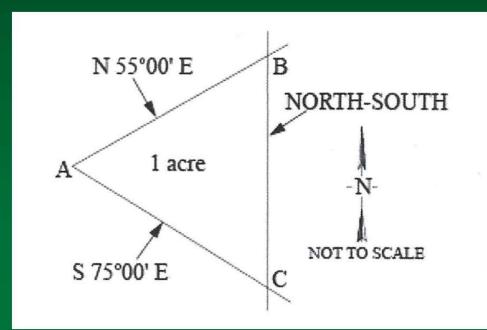



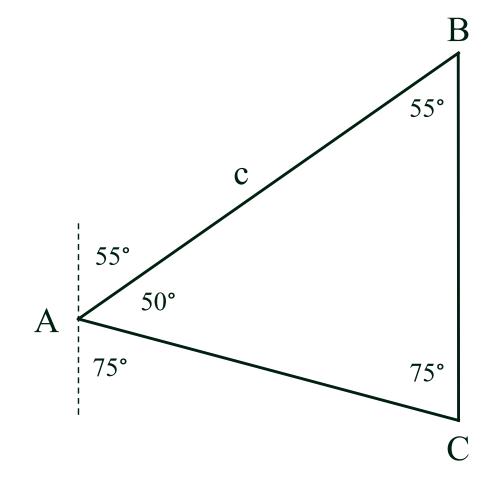


$$Area = \frac{c^2 \sin A \sin B}{2 \sin C}$$
$$43560 = \frac{c^2 \sin 50 \sin 55}{2 \sin 75}$$
$$c^2 = \frac{2 (43560) \sin 75}{\sin 50 \sin 55}$$
$$= 134,104.44$$

c = 366.20




- 2. A client wants to create a 1-acre parcel by establishing a North-South line, BC, as shown in the figure.
- \checkmark The length (ft.) of Side AB is most nearly:
 - A. 299.96
 B. 352.84
 C. 358.73
 D. 366.20

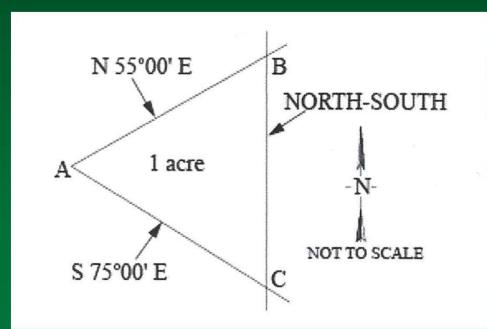



- 2. A client wants to create a 1-acre parcel by establishing a North-South line, BC, as shown in the figure.
- \checkmark The length (ft.) of Side AB is most nearly:
 - A. 299.96
 B. 352.84
 C. 358.73
 D. 366.20

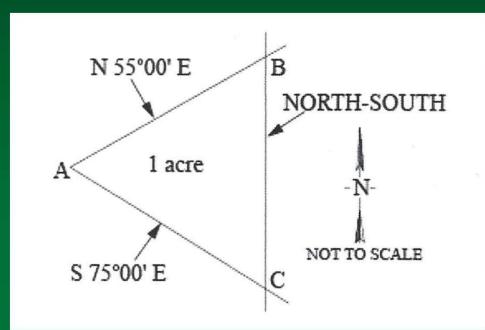




- ✓ 3. The center of a circle with a radius of 4 is at x = 5, y = -2.
- \checkmark The equation of the circle is:

A.
$$(x-5)^2 + (y-2)^2 - 4 = 0$$

B. $(x+5)^2 + (y+2)^2 - 4 = 0$
C. $(x-5)^2 + (y+2)^2 - 16 = 0$
D. $(x-5)^2 + (y+2)^2 + 16 = 0$



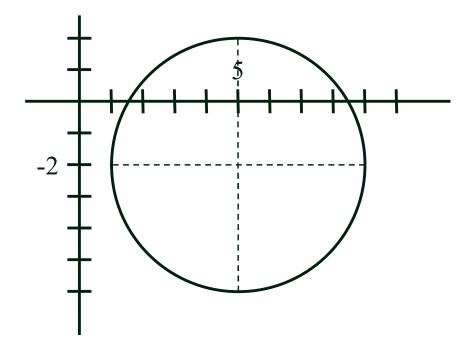

$$\Delta x^{2} + \Delta y^{2} = r^{2}$$
$$(x - (5))^{2} + (y - (-2))^{2} = 4^{2}$$
$$(x - 5)^{2} + (y + 2)^{2} - 16 = 0$$



- ✓ 3. The center of a circle with a radius of 4 is at x = 5, y = -2.
- \checkmark The equation of the circle is:

A.
$$(x-5)^2 + (y-2)^2 - 4 = 0$$

B. $(x+5)^2 + (y+2)^2 - 4 = 0$
C. $(x-5)^2 + (y+2)^2 - 16 = 0$
D. $(x-5)^2 + (y+2)^2 + 16 = 0$



- ✓ 3. The center of a circle with a radius of 4 is at x = 5, y = -2.
- \checkmark The equation of the circle is:

A.
$$(x-5)^2 + (y-2)^2 - 4 = 0$$


B. $(x+5)^2 + (y+2)^2 - 4 = 0$
C. $(x-5)^2 + (y+2)^2 - 16 = 0$
D. $(x-5)^2 + (y+2)^2 + 16 = 0$



- 4. A thin-walled tank is constructed as a body of revolution of a parabola, as shown in the figure. The base diameter is 20 ft., and the height of the tank is 25 ft.
- \checkmark The volume (ft.³) of water in the tank when full is most nearly:

A.
$$\frac{500}{3}\pi$$

B. $\frac{625}{2}\pi$
C. $\frac{625}{2}(9-4\sqrt{2})\pi$
D. $\frac{6875}{6}\pi$

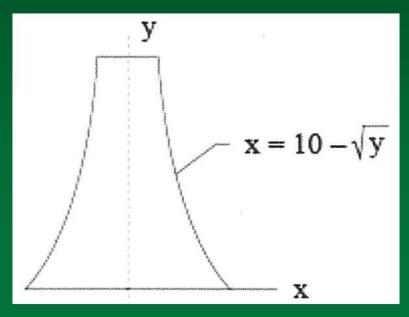



$$\pi \int_{a}^{b} R^{2} dh = \pi \int_{0}^{25} (10 - \sqrt{y})^{2} dy = \pi \int_{0}^{25} (100 - 20\sqrt{y} + y) dy$$
$$= \pi \int_{0}^{25} 100 dy - 20 \pi \int_{0}^{25} y^{\frac{1}{2}} dy + \pi \int_{0}^{25} y dy$$
$$= 100\pi y \Big|_{0}^{25} - 20\pi \frac{y^{\frac{3}{2}}}{\frac{3}{2}} \Big|_{0}^{25} + \pi \frac{y^{2}}{2} \Big|_{0}^{25}$$

$$= 2500\pi - \frac{40}{3}\pi(125) + \frac{\pi}{2}(625) = \frac{15,000}{6}\pi - \frac{10,000}{6}\pi + \frac{1875}{6}\pi$$


$$= \frac{6875}{6}\pi$$



- A thin-walled tank is constructed as a body of revolution of a parabola, as shown in the figure. The base diameter is 20 ft., and the height of the tank is 25 ft.
- \checkmark The volume (ft.³) of water in the tank when full is most nearly:

A.
$$\frac{500}{3}\pi$$

B. $\frac{625}{2}\pi$
C. $\frac{625}{2}(9-4\sqrt{2})\pi$
D. $\frac{6875}{6}\pi$

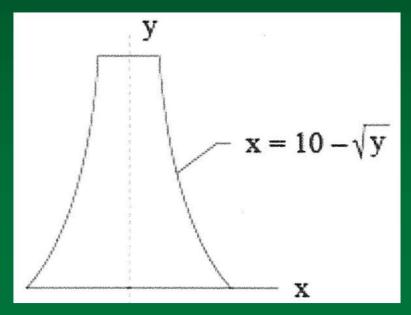




- A thin-walled tank is constructed as a body of revolution of a parabola, as shown in the figure. The base diameter is 20 ft., and the height of the tank is 25 ft.
- \checkmark The volume (ft.³) of water in the tank when full is most nearly:

A.
$$\frac{500}{3}\pi$$

B. $\frac{625}{2}\pi$
C. $\frac{625}{2}(9-4\sqrt{2})\pi$
D. $\frac{6875}{6}\pi$

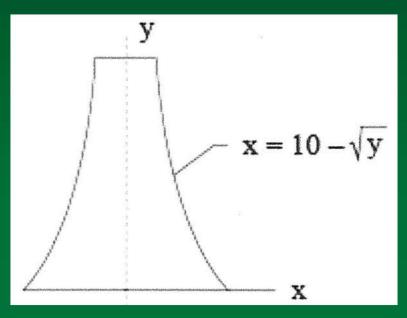



 \checkmark 5. Which object described below will subtend the greatest angle at your eye?

- A. A tree 18 feet tall at 100 yards away
- B. A house 12 feet tall at 180 feet away
- C. A 1/2-inch-diameter coin at 10 inches away
- D. The 2,170-mile-diameter moon at 240,000 miles away



$$\frac{18}{100(3)} = \frac{18}{300} = 0.0600$$

$$\frac{12}{180} = 0.0667$$

$$\frac{0.5}{10} = \frac{1}{20} = 0.0500$$

$$\frac{2,170}{240,000} = 0.0090$$



 \checkmark 5. Which object described below will subtend the greatest angle at your eye?

- A. A tree 18 feet tall at 100 yards away
- B. A house 12 feet tall at 180 feet away
- C. A 1/2-inch-diameter coin at 10 inches away
- D. The 2,170-mile-diameter moon at 240,000 miles away




 \checkmark 5. Which object described below will subtend the greatest angle at your eye?

- A. A tree 18 feet tall at 100 yards away
- B. A house 12 feet tall at 180 feet away
- C. A 1/2-inch-diameter coin at 10 inches away
- D. The 2,170-mile-diameter moon at 240,000 miles away




- ✓ 6. An island is formed by the intersections of Birch, Oak, and Ash Streets.
 Specific details of the intersection are shown in the figure below.
- The length (ft.) of the right-of-way line along the Birch Street side of the island is most nearly:

Α.	46.95
B.	47.35
C.	47.70
D.	47.90

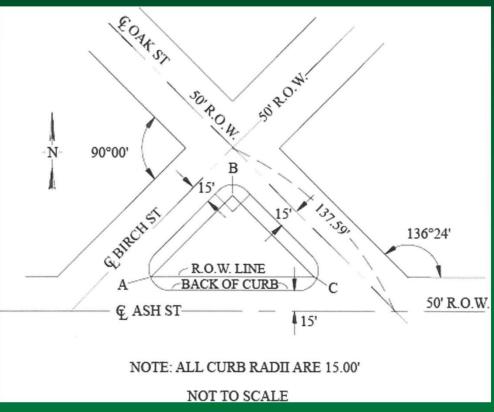



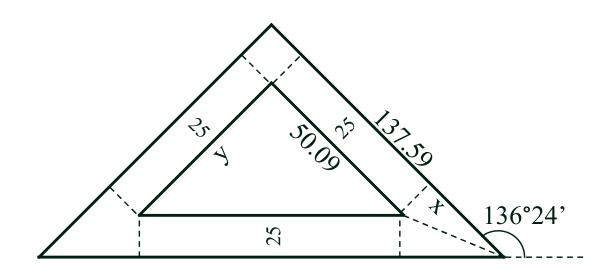

$$180^{\circ} - 136^{\circ}24' = 43^{\circ}36'$$
$$\frac{43^{\circ}36'}{2} = 21^{\circ}48'$$
$$\tan 21^{\circ}48' = \frac{25}{x}$$
$$x = 62.50$$


137.59 - 25.00 - 62.50 = 50.09

$$\tan 43^{\circ}36' = \frac{y}{50.09}$$
$$y = 47.70$$



- ✓ 6. An island is formed by the intersections of Birch, Oak, and Ash Streets.
 Specific details of the intersection are shown in the figure below.
- The length (ft.) of the right-of-way line along the Birch Street side of the island is most nearly:


Α.	46.95
B.	47.35
C.	47.70
D.	47.90

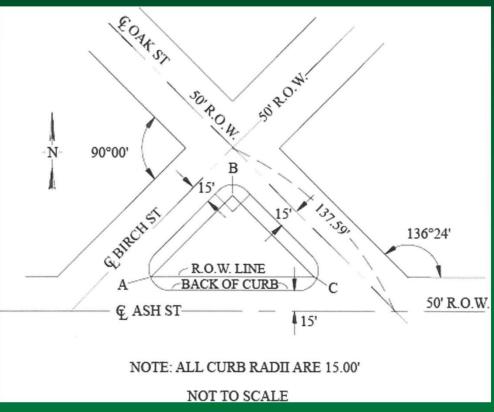



- ✓ 6. An island is formed by the intersections of Birch, Oak, and Ash Streets.
 Specific details of the intersection are shown in the figure below.
- The length (ft.) of the right-of-way line along the Birch Street side of the island is most nearly:

A. 46.95
B. 47.35
C. 47.70
D. 47.90

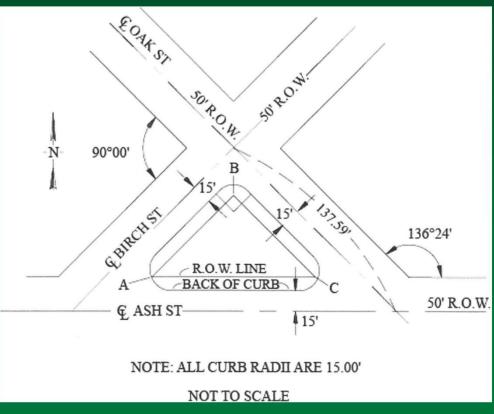



- ✓ 7. A thermometer, which is also known to read 3°F too high, records a temperature of 46°F.
- \checkmark The correct temperature is most nearly:
 - A. 6.1°C
 - B. 7.8°C
 - C. 9.4°C
 - D. 25.2°C



$$C = \frac{5}{9}(F - 32)$$

$$C = \frac{5}{9}(43 - 32) = \frac{5}{9}(11) = \frac{55}{9} = 6.1$$
°C



- ✓ 7. A thermometer, which is also known to read 3°F too high, records a temperature of 46°F.
- \checkmark The correct temperature is most nearly:
 - A. 6.1°C
 - B. 7.8°C
 - C. 9.4°C
 - D. 25.2°C



- ✓ 7. A thermometer, which is also known to read 3°F too high, records a temperature of 46°F.
- \checkmark The correct temperature is most nearly:
 - A. 6.1°C
 B. 7.8°C
 C. 9.4°C
 D. 25.2°C



- 8. Two brass monuments set on a shady sidewalk have a known, verified horizontal separation of 99.96 ft. A surveyor measures between the monuments with a tape and reads 99.99 ft. at a temperature of 83°F, holding a tension of 15 lb. while the tape is fully supported.
- ✓ The length (ft.) of the surveyor's tape between the 0 and 100 marks while the temperature remains at 83°F is most nearly:
 - A. 99.95
 - B. 99.97
 - C. 100.03
 - D. The question cannot be answered with the information given.



99.99' measured

x' true

100.00' measured

$$\frac{99.96}{99.99} = \frac{x}{100.00}$$

x = 99.97



- 8. Two brass monuments set on a shady sidewalk have a known, verified horizontal separation of 99.96 ft. A surveyor measures between the monuments with a tape and reads 99.99 ft. at a temperature of 83°F, holding a tension of 15 lb. while the tape is fully supported.
- ✓ The length (ft.) of the surveyor's tape between the 0 and 100 marks while the temperature remains at 83°F is most nearly:
 - A. 99.95
 - B. 99.97
 - C. 100.03
 - D. The question cannot be answered with the information given.



- 8. Two brass monuments set on a shady sidewalk have a known, verified horizontal separation of 99.96 ft. A surveyor measures between the monuments with a tape and reads 99.99 ft. at a temperature of 83°F, holding a tension of 15 lb. while the tape is fully supported.
- ✓ The length (ft.) of the surveyor's tape between the 0 and 100 marks while the temperature remains at 83°F is most nearly:
 - A. 99.95
 - B. 99.97
 - C. 100.03
 - D. The question cannot be answered with the information given.



✓ 9. Direct and reverse zenith angles to a point are read as follows: $D = 36^{\circ}12'18''$

R = 323°47'36"

- ✓ The vertical circle reading that must be set in the instrument to produce a vertical angle of 12°16'12" is most nearly:
 - A. 77°43'45"
 - B. 77°43'48"
 - C. 77°43'51"
 - D. 77°43'54"



raw	adjusted	true vertical
zenith angles	zenith angles	12-16-12
36-12-18	36-12-21	true zenith
+ 323-47-36	+ 323-47-39	77-43-48
359-59-54	359-59-60	
		actual zenith
6" short	check	77-43-45



✓ 9. Direct and reverse zenith angles to a point are read as follows: $D = 36^{\circ}12'18''$

R = 323°47'36"

- ✓ The vertical circle reading that must be set in the instrument to produce a vertical angle of 12°16'12" is most nearly:
 - A. 77°43'45"
 - B. 77°43'48"
 - C. 77°43'51"
 - D. 77°43'54"



✓ 9. Direct and reverse zenith angles to a point are read as follows: $D = 36^{\circ}12'18''$


R = 323°47'36"

- ✓ The vertical circle reading that must be set in the instrument to produce a vertical angle of 12°16'12" is most nearly:
 - A. 77°43'45"
 - B. 77°43'48"
 - C. 77°43'51"
 - D. 77°43'54"



- ✓ 10. The elevation of BM A is 644.00 ft. A level in perfect adjustment is set midway between BM A and BM B. The backsight reading is 8.76 ft. and the foresight reading is 3.21 ft.
- ✓ If the level rod at BM B is held at an angle of 10° to the vertical, then the correct elevation (ft.) of BM B is:
 - A. 638.40
 - B. 649.50
 - C. 649.55
 - D. 649.60



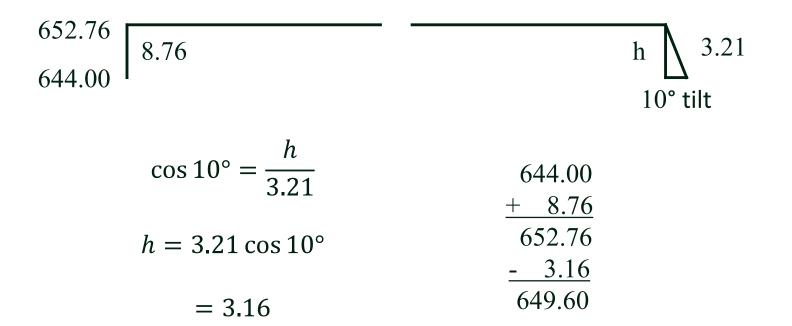



- ✓ 10. The elevation of BM A is 644.00 ft. A level in perfect adjustment is set midway between BM A and BM B. The backsight reading is 8.76 ft. and the foresight reading is 3.21 ft.
- ✓ If the level rod at BM B is held at an angle of 10° to the vertical, then the correct elevation (ft.) of BM B is:
 - A. 638.40
 - B. 649.50
 - C. 649.55
 - D. 649.60



- ✓ 10. The elevation of BM A is 644.00 ft. A level in perfect adjustment is set midway between BM A and BM B. The backsight reading is 8.76 ft. and the foresight reading is 3.21 ft.
- ✓ If the level rod at BM B is held at an angle of 10° to the vertical, then the correct elevation (ft.) of BM B is:
 - A. 638.40
 - B. 649.50
 - C. 649.55
 - D. 649.60



✓ 11. Consider the following

 $A = B^*C + D/C^2$

Where: B = 2 C = 0.5 D = 127

The following notation applies to this question:

* = multiply / = divide ^ = raise to exponent

✓ If the question were executed by a spreadsheet or computer, the value of A would be most nearly:

- A. 509
- B. 512
- C. 130,050
- D. 299,081



$$A = B * C + D/C^2$$

$$= (2) \cdot (0.5) + 127/(0.5)^2$$

$$=1+\frac{127}{0.25}$$
 = 1 + 127(4)

$$= 1 + 508 = 509$$



✓ 11. Consider the following

 $A = B^*C + D/C^2$

Where: B = 2 C = 0.5 D = 127

The following notation applies to this question:

* = multiply / = divide ^ = raise to exponent

✓ If the question were executed by a spreadsheet or computer, the value of A would be most nearly:

- A. 509
- B. 512
- C. 130,050
- D. 299,081



✓ 11. Consider the following

 $A = B^*C + D/C^2$

Where: B = 2 C = 0.5 D = 127

The following notation applies to this question:

* = multiply / = divide ^ = raise to exponent

✓ If the question were executed by a spreadsheet or computer, the value of A would be most nearly:

A. 509
B. 512
C. 130,050
D. 299,081




12. A survey party has set offset stakes for construction of an 8-in. sewer shown in the design plan. When the existing 12-in. sewer line is uncovered for the construction of Maintenance Hole (MH) 1, it is found that the actual flow line elevation is 1,228.69 ft. rather than the design elevation of 1,228.47 ft. The gradient must be revised, holding the flow line elevation of 1,229.27 ft. at MH 2. If the elevation of the grade stake is 1,235.06 ft., the cut (ft.) to the flow line that you would mark on the stake at Station 1+25 is most nearly:

A.	5.98
B.	6.08
C.	6.18
D.	6.25

OVER EXISTING SEWER LINE STA. 0+00 FLOW LINE ELEV. 1,228.47	8" SEWER + 0.325%	CONSTRUCT MH 2 STA. 2+47.55 FLOW LINE ELEV. 1,229.27
12	NOT TO SCALE	



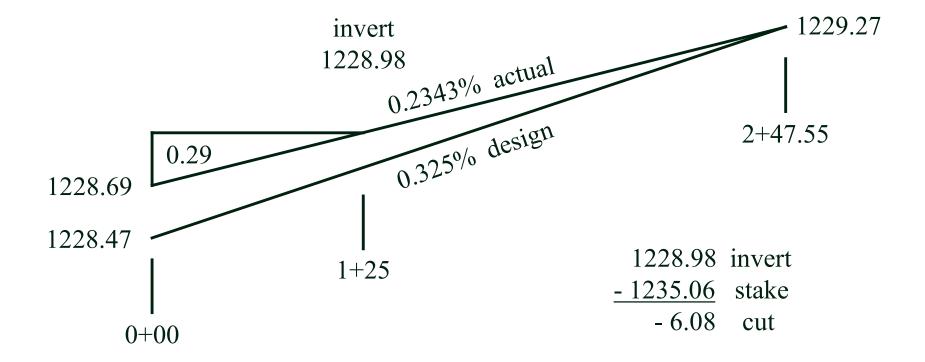



✓ 12. A survey party has set offset stakes for construction of an 8-in. sewer shown in the design plan. When the existing 12-in. sewer line is uncovered for the construction of Maintenance Hole (MH) 1, it is found that the actual flow line elevation is 1,228.69 ft. rather than the design elevation of 1,228.47 ft. The gradient must be revised, holding the flow line elevation of 1,229.27 ft. at MH 2. If the elevation of the grade stake is 1,235.06 ft., the cut (ft.) to the flow line that you would mark on the stake at Station 1+25 is most nearly:

A.	5.98
B.	6.08
C.	6.18
D.	6.25

CONSTRUCT MH 1 OVER EXISTING SEWER LINE STA. 0+00 FLOW LINE ELEV. 1,228.47	8" SEWER + 0.325%	CONSTRUCT MH 2 STA. 2+47.55 FLOW LINE ELEV. 1,229.27
12"	NOT TO SCALE	



✓ 12. A survey party has set offset stakes for construction of an 8-in. sewer shown in the design plan. When the existing 12-in. sewer line is uncovered for the construction of Maintenance Hole (MH) 1, it is found that the actual flow line elevation is 1,228.69 ft. rather than the design elevation of 1,228.47 ft. The gradient must be revised, holding the flow line elevation of 1,229.27 ft. at MH 2. If the elevation of the grade stake is 1,235.06 ft., the cut (ft.) to the flow line that you would mark on the stake at Station 1+25 is most nearly:

A.	5.98	(DNIL
B.	6.08	(EXIS
C.	6.18	12" SEWER (EXISTING
D.	6.25	12" S

SEWER (EXISTING)	CONSTRUCT MH 1 OVER EXISTING SEWER LINE STA. 0+00 FLOW LINE ELEV. 1,228.47	8" SEWER + 0.325%	CONSTRUCT MH 2 STA. 2+47.55 FLOW LINE ELEV. 1,229.27
12"		NOT TO SCALE	




✓ 13. A traverse was run from Point A to Point E, and the coordinates of each point were computed with the following results:

Point	X Coordinate	Y Coordinate
Α	100.00	100.00
В	250.55	232.66
С	388.26	95.98
D	466.15	2.15
E	609.50	-11.92

 The distance and bearing, respectively, of a straight line from Point A to Point E are most nearly:

- A. 517.06 ft., S 09°54' E
- B. 517.06 ft., S 80°06' E
- C. 521.65 ft., S 12°23' E
- D. 521.65 ft., S 77°37' E



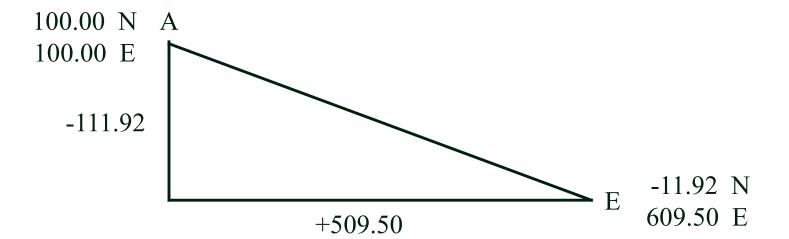

Angle =
$$\operatorname{atan}\left(\frac{509.50}{111.92}\right) = S \ 77-36-39 \ E$$

Distance = $\sqrt{(509.50)^2 + (111.92)^2} = 521.65$



✓ 13. A traverse was run from Point A to Point E, and the coordinates of each point were computed with the following results:

Point	X Coordinate	Y Coordinate
Α	100.00	100.00
В	250.55	232.66
С	388.26	95.98
D	466.15	2.15
E	609.50	-11.92

 The distance and bearing, respectively, of a straight line from Point A to Point E are most nearly:

- A. 517.06 ft., S 09°54' E
- B. 517.06 ft., S 80°06' E
- C. 521.65 ft., S 12°23' E
- D. 521.65 ft., S 77°37' E



✓ 13. A traverse was run from Point A to Point E, and the coordinates of each point were computed with the following results:

Point	X Coordinate	Y Coordinate
Α	100.00	100.00
В	250.55	232.66
С	388.26	95.98
D	466.15	2.15
E	609.50	-11.92


 The distance and bearing, respectively, of a straight line from Point A to Point E are most nearly:

- A. 517.06 ft., S 09°54' E
- B. 517.06 ft., S 80°06' E
- C. 521.65 ft., S 12°23' E
- D. 521.65 ft., S 77°37' E



- ✓ 14. The coordinates of Point Q on a highway spiral relative to the TS are: X = 200, Y = 5.
- \checkmark The deflection angle from the TS to Point Q is most nearly:
 - A. 0°28'38"
 - B. 1°25'55"
 - C. 2°50'00"
 - D. 4°05'02"



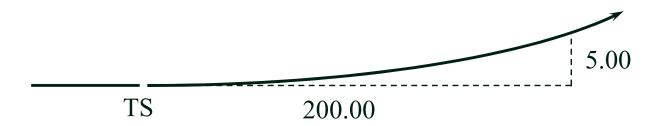

Deflection =
$$atan\left(\frac{5.00}{200.00}\right) = 01-25-56$$



- ✓ 14. The coordinates of Point Q on a highway spiral relative to the TS are: X = 200, Y = 5.
- \checkmark The deflection angle from the TS to Point Q is most nearly:
 - A. 0°28'38"
 - B. 1°25'55"
 - C. 2°50'00"
 - D. 4°05'02"




- ✓ 14. The coordinates of Point Q on a highway spiral relative to the TS are: X = 200, Y = 5.
- \checkmark The deflection angle from the TS to Point Q is most nearly:
 - A. 0°28'38"
 - B. 1°25'55"
 - C. 2°50'00"
 - D. 4°05'02"



\checkmark 15. The following deflection angles were measured in a closed traverse:

- P: 92°24' R
- Q: 150°42' R
- R: 15°37' L
- S: 132°35' R
- \checkmark The balanced deflection angle at R is most nearly:
 - A. 15°36' L
 - B. 15°37' L
 - C. 15°38' L
 - D. 15°39' L



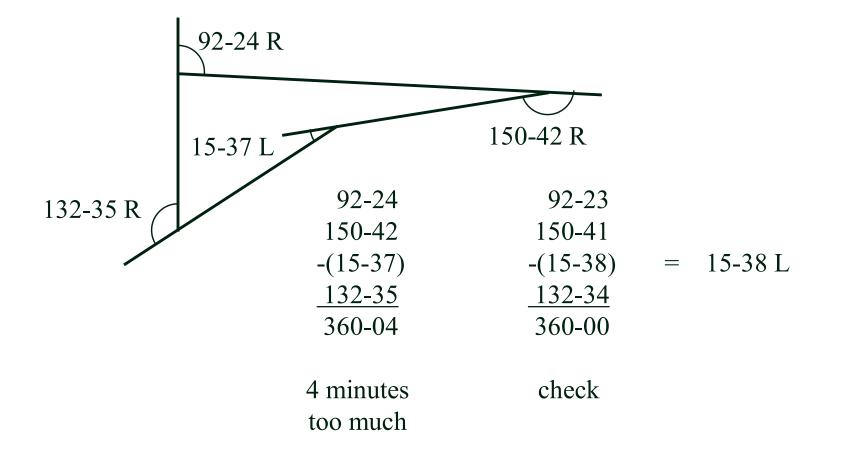



\checkmark 15. The following deflection angles were measured in a closed traverse:

- P: 92°24' R
- Q: 150°42' R
- R: 15°37' L
- S: 132°35' R
- \checkmark The balanced deflection angle at R is most nearly:
 - A. 15°36' L
 - B. 15°37' L
 - C. 15°38' L
 - D. 15°39' L




\checkmark 15. The following deflection angles were measured in a closed traverse:

- P: 92°24' R
- Q: 150°42' R
- R: 15°37' L
- S: 132°35' R
- \checkmark The balanced deflection angle at R is most nearly:
 - A. 15°36' L
 - B. 15°37' L
 - C. 15°38' L
 - D. 15°39' L



- ✓ 16. A clear zone avigation easement with a 34:1 slope begins at ground level 200 ft. from the end of an active airport runway. The natural ground slope moving away from a point 200 ft. from the end of the runway is 0.5% in an uphill direction.
- ✓ At what distance (ft.) from the end of the runway can a 35-ft-tall structure be located and not violate the clear zone easement?
 - A. 1,434
 - B. 1,593
 - C. 1,634
 - D. 1,675



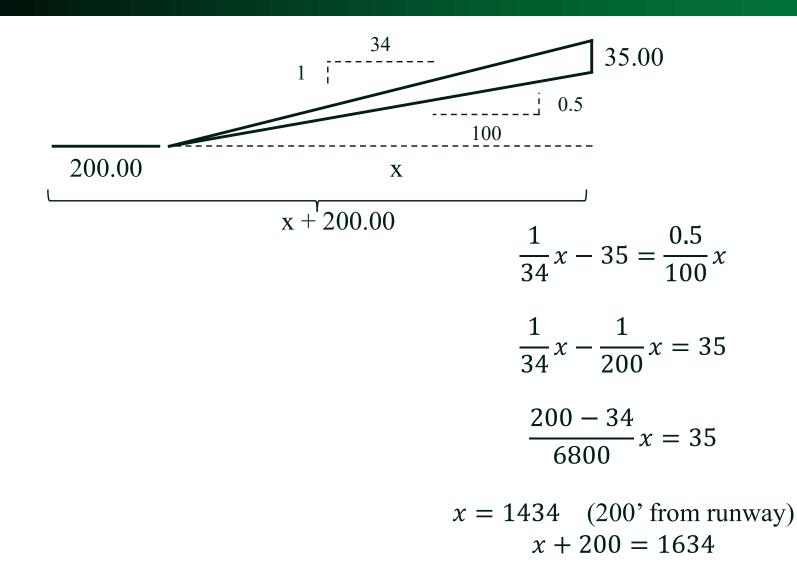



- ✓ 16. A clear zone avigation easement with a 34:1 slope begins at ground level 200 ft. from the end of an active airport runway. The natural ground slope moving away from a point 200 ft. from the end of the runway is 0.5% in an uphill direction.
- ✓ At what distance (ft.) from the end of the runway can a 35-ft-tall structure be located and not violate the clear zone easement?
 - A. 1,434
 - B. 1,593
 - C. 1,634
 - D. 1,675



- ✓ 16. A clear zone avigation easement with a 34:1 slope begins at ground level 200 ft. from the end of an active airport runway. The natural ground slope moving away from a point 200 ft. from the end of the runway is 0.5% in an uphill direction.
- ✓ At what distance (ft.) from the end of the runway can a 35-ft-tall structure be located and not violate the clear zone easement?
 - A. 1,434
 B. 1,593
 C. 1,634
 D. 1,675



 \checkmark 17. The sum of the exterior angles of an eight-sided figure is most nearly:

- A. 1,800°
- B. 1,440°
- C. 1,080°
- D. none of the above



exterior angles

- = 180(n+2)
- = 180(8+2)
- = 180 (10)
- = 1800°



 \checkmark 17. The sum of the exterior angles of an eight-sided figure is most nearly:

- A. 1,800°
- B. 1,440°
- C. 1,080°
- D. none of the above




✓ 17. The sum of the exterior angles of an eight-sided figure is most nearly:

- A. 1,800°
- B. 1,440°
- C. 1,080°
- D. none of the above




- ✓ 18. You are to set slope stakes along the roads within a subdivision. At Station 2+00 the finish grade elevation is 110.31 at the edge of the road, and the distance from the centerline to the edge of the road is 12.0 ft. The rod is being held at a distance of 28.5 ft. from the centerline and the rod reading is 12.1 ft. while the H.I. is 119.77 ft. Typical cut and fill sections are shown below.
- ✓ Your next step would be to:
 - A. move in about 6 ft. and try again
 - B. move in about 10 ft. and try again
 - C. move out about 6 ft. and try again

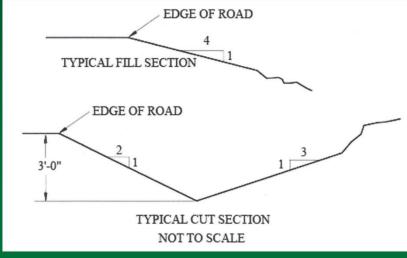


D. drive in a stake since you are at the slope stake



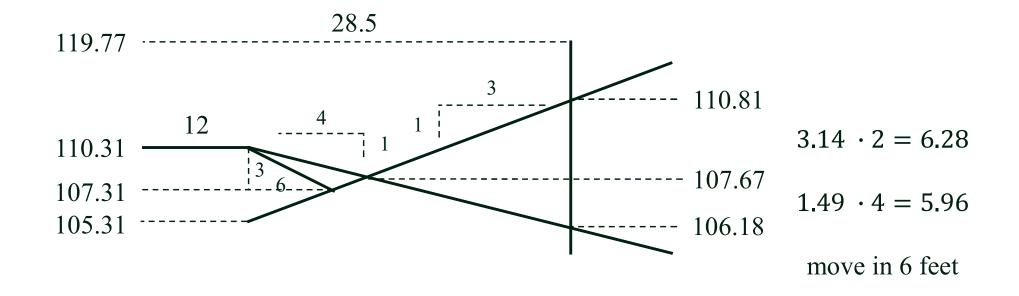




- ✓ 18. You are to set slope stakes along the roads within a subdivision. At Station 2+00 the finish grade elevation is 110.31 at the edge of the road, and the distance from the centerline to the edge of the road is 12.0 ft. The rod is being held at a distance of 28.5 ft. from the centerline and the rod reading is 12.1 ft. while the H.I. is 119.77 ft. Typical cut and fill sections are shown below.
- ✓ Your next step would be to:
 - A. move in about 6 ft. and try again
 - B. move in about 10 ft. and try again
 - C. move out about 6 ft. and try again

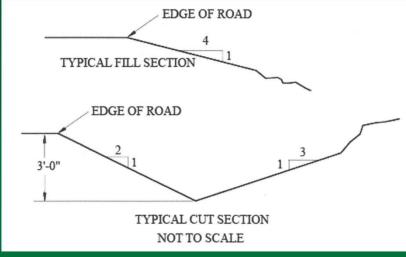

D. drive in a stake since you are at the slope stake



- ✓ 18. You are to set slope stakes along the roads within a subdivision. At Station 2+00 the finish grade elevation is 110.31 at the edge of the road, and the distance from the centerline to the edge of the road is 12.0 ft. The rod is being held at a distance of 28.5 ft. from the centerline and the rod reading is 12.1 ft. while the H.I. is 119.77 ft. Typical cut and fill sections are shown below.
- ✓ Your next step would be to:
 - A. move in about 6 ft. and try again
 - B. move in about 10 ft. and try again
 - C. move out about 6 ft. and try again

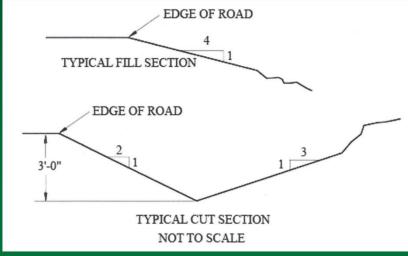


D. drive in a stake since you are at the slope stake



- ✓ 19. A small rectangular lot measures 120.00 \pm 0.04 ft. by 144.00 \pm 0.05 ft.
- \checkmark The area (ft.²) of the lot is best stated as:
 - A. 17,280 ± 4.7
 - B. 17,280 ± 8.3
 - C. 17,280 ± 49.7
 - D. 17,280 ± 87



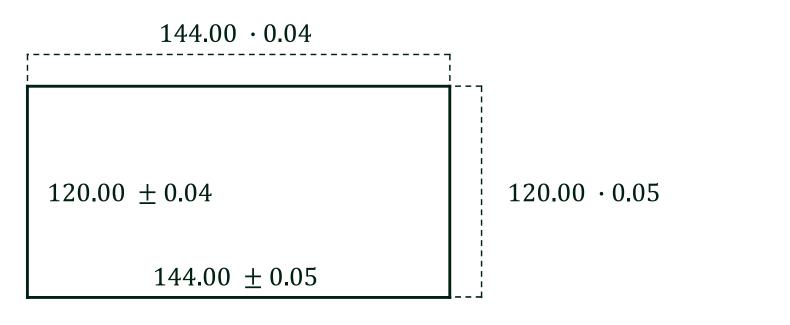

$144 \cdot 120 = 17,280$

 $\sqrt{(144 \cdot 0.04)^2 + (120 \cdot 0.05)^2} = 8.3$

17,280 ± 8.3



- ✓ 19. A small rectangular lot measures 120.00 \pm 0.04 ft. by 144.00 \pm 0.05 ft.
- \checkmark The area (ft.²) of the lot is best stated as:
 - A. 17,280 ± 4.7
 - B. 17,280 ± 8.3
 - C. 17,280 ± 49.7
 - D. 17,280 ± 87




- ✓ 19. A small rectangular lot measures 120.00 \pm 0.04 ft. by 144.00 \pm 0.05 ft.
- \checkmark The area (ft.²) of the lot is best stated as:
 - A. 17,280 ± 4.7
 - B. 17,280 ± 8.3
 - C. 17,280 ± 49.7
 - D. 17,280 ± 87



- ✓ 20. After leveling up a hill where backsight distances were taken at 200 ft. and foresight distances at 150 ft. you discovered that the line of sight was inclined upward at 0.012 ft. per 100-ft. sight distance. The difference in elevation between the starting BM A and ending BM B was +50.035 ft. There were 20 instrument setups.
- ✓ The adjusted elevation difference (ft.) after correcting for line of sight inclination is most nearly:
 - A. 49.915
 - B. 50.023
 - C. 50.029
 - D. 50.155



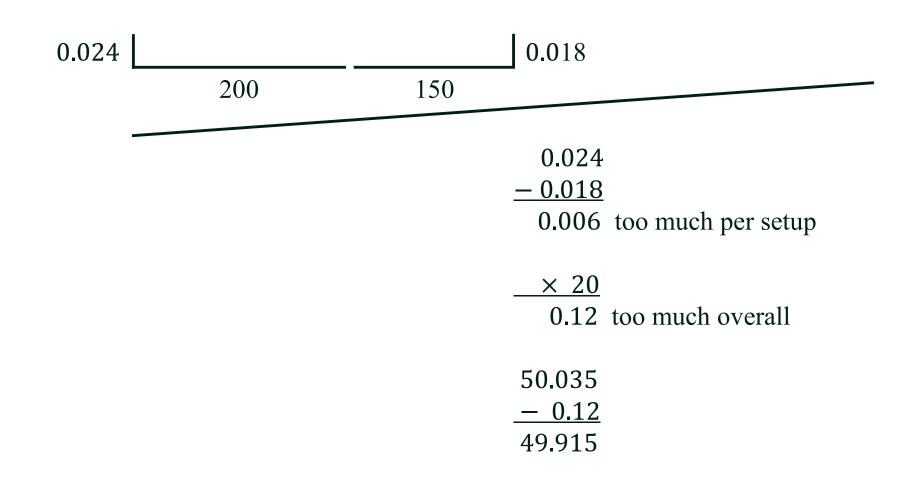



- ✓ 20. After leveling up a hill where backsight distances were taken at 200 ft. and foresight distances at 150 ft. you discovered that the line of sight was inclined upward at 0.012 ft. per 100-ft. sight distance. The difference in elevation between the starting BM A and ending BM B was +50.035 ft. There were 20 instrument setups.
- ✓ The adjusted elevation difference (ft.) after correcting for line of sight inclination is most nearly:
 - A. 49.915
 - B. 50.023
 - C. 50.029
 - D. 50.155



- ✓ 20. After leveling up a hill where backsight distances were taken at 200 ft. and foresight distances at 150 ft. you discovered that the line of sight was inclined upward at 0.012 ft. per 100-ft. sight distance. The difference in elevation between the starting BM A and ending BM B was +50.035 ft. There were 20 instrument setups.
- ✓ The adjusted elevation difference (ft.) after correcting for line of sight inclination is most nearly:
 - A. 49.915
 - B. 50.023
 - C. 50.029
 - D. 50.155



✓ 21. An angle is measured with a 1" theodolite twelve times with the following results:

223°14'56"	223°14'53"	223°14'58"
223°14'52"	223°14'55"	223°14'59"
223°14'58"	223°15'02"	223°14'55"
223°14'59"	223°15'00"	223°14'54"

✓ The standard deviation of the **mean** is most nearly:

- A. <u>+</u>0.9"
- B. <u>+</u>1.5"
- C. <u>+</u>2.8"
- D. <u>+</u>3.3"




Average = 223-14-56.75

+0.75	+ 3.75	- 1.25
+4.75	+ 1.75	- 2.25
-1.25	- 5.25	+ 1.75
-2.25	- 3.25	+ 2.75

 $\sum v^2 = 102.25$ $\sigma = 2.9190$

Standard deviation of the mean:



Population over 10 :

 $\frac{\sigma}{\sqrt{11}} = 0.88$



✓ 21. An angle is measured with a 1" theodolite twelve times with the following results:

59"
55"
54"
Ę

 \checkmark The standard deviation of the **mean** is most nearly:

- A. <u>+</u>0.9"
- B. <u>+</u>1.5"
- C. <u>+</u>2.8"
- D. <u>+</u>3.3"



✓ 21. An angle is measured with a 1" theodolite twelve times with the following results:

223°14'56"	223°14'53"	223°14'58"
223°14'52"	223°14'55"	223°14'59"
223°14'58"	223°15'02"	223°14'55"
223°14'59"	223°15'00"	223°14'54"


✓ The standard deviation of the **mean** is most nearly:

- A. <u>+</u>0.9"
- B. <u>±</u>1.5"
- C. <u>+</u>2.8"
- D. <u>+</u>3.3"



- ✓ 22. An EDM distance of 1 mile is measured at an elevation of 1 mile.
 The earth's radius R is assumed to be 20,906,000 ft.
- ✓ The sea level distance (ft.) is most nearly:
 - A. 5,270.02
 - B. 5,278.67
 - C. 5,280.00
 - D. 5,281.33



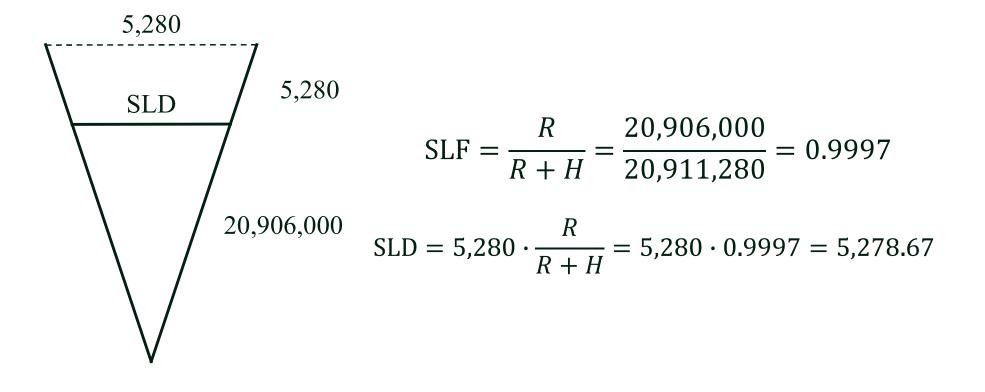



- ✓ 22. An EDM distance of 1 mile is measured at an elevation of 1 mile.
 The earth's radius R is assumed to be 20,906,000 ft.
- ✓ The sea level distance (ft.) is most nearly:
 - A. 5,270.02
 - B. 5,278.67
 - C. 5,280.00
 - D. 5,281.33



- ✓ 22. An EDM distance of 1 mile is measured at an elevation of 1 mile.
 The earth's radius R is assumed to be 20,906,000 ft.
- ✓ The sea level distance (ft.) is most nearly:
 - A. 5,270.02
 - B. 5,278.67
 - C. 5,280.00
 - D. 5,281.33




✓ 23. The original government record of a fractional lot in the northwest quarter of Section 5 shows the following dimensions in chains:


north side	19.83
east side	19.09
west side	19.31
south side	20.14

 \checkmark The area (acres) of the lot on the original township plat would be most nearly:

- A. 38.33
- B. 38.35
- C. 38.37
- D. 38.39



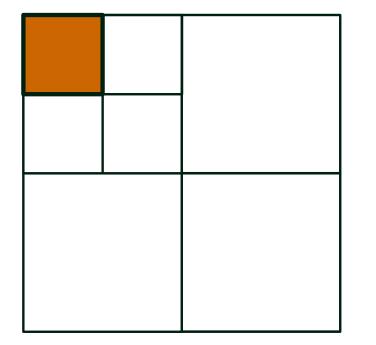

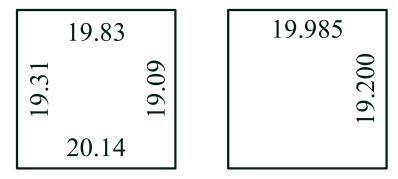

 $19.985 \cdot 19.200$ = 383.712 sq. chains = 38.37 acres



✓ 23. The original government record of a fractional lot in the northwest quarter of Section 5 shows the following dimensions in chains:

north side	19.83
east side	19.09
west side	19.31
south side	20.14

 \checkmark The area (acres) of the lot on the original township plat would be most nearly:

- A. 38.33
- B. 38.35
- C. 38.37
- D. 38.39



✓ 23. The original government record of a fractional lot in the northwest quarter of Section 5 shows the following dimensions in chains:

north side	19.83
east side	19.09
west side	19.31
south side	20.14

 \checkmark The area (acres) of the lot on the original township plat would be most nearly:

- A. 38.33
- B. 38.35
- C. 38.37
- D. 38.39



- ✓ 24. Section 18 of T21N, R6W, was subdivided for the first time about 20 years ago. You wish to retrace that survey. The official distance shown in government notes for the north line of Section 18 is 78.39 chains.
- ✓ The measurement (chains) that should have been used for the north line of the NW 1/4 of the NW 1/4 (also called Lot 1) is most nearly:
 - A. 18.39
 - B. 19.20
 - C. 19.60
 - D. 38.39



78.39					
18.39	20	20	20		
	SEC	18			



- ✓ 24. Section 18 of T21N, R6W, was subdivided for the first time about 20 years ago. You wish to retrace that survey. The official distance shown in government notes for the north line of Section 18 is 78.39 chains.
- ✓ The measurement (chains) that should have been used for the north line of the NW 1/4 of the NW 1/4 (also called Lot 1) is most nearly:
 - A. 18.39
 - B. 19.20
 - C. 19.60
 - D. 38.39



- ✓ 24. Section 18 of T21N, R6W, was subdivided for the first time about 20 years ago. You wish to retrace that survey. The official distance shown in government notes for the north line of Section 18 is 78.39 chains.
- ✓ The measurement (chains) that should have been used for the north line of the NW 1/4 of the NW 1/4 (also called Lot 1) is most nearly:

A. 18.39B. 19.20

- C. 19.60
- D. 38.39



- 25. The distance on a vertical aerial photograph between two east-west hedge lines is measured and found to be 7.96 in. The hedge lines are approximately the north and south section lines of Section 16, which is regular. The terrain is approximately level.
- \checkmark What is the approximate photo scale in the area between the two hedges?
 - A. 1:663
 - B. 1:24,000
 - C. 1 in. = 663 ft.
 - D. 1 in. = 7,960 ft.



	hedge line	
 	700	I
	7.96"	
	5,280'	
 	hedge line	i 1
	Section 16	

$$\frac{5,280}{7.96} = 663 \ \frac{ft}{in}$$

1 in. = 663 ft.



- 25. The distance on a vertical aerial photograph between two east-west hedge lines is measured and found to be 7.96 in. The hedge lines are approximately the north and south section lines of Section 16, which is regular. The terrain is approximately level.
- \checkmark What is the approximate photo scale in the area between the two hedges?
 - A. 1:663
 - B. 1:24,000
 - C. 1 in. = 663 ft.
 - D. 1 in. = 7,960 ft.



- 25. The distance on a vertical aerial photograph between two east-west hedge lines is measured and found to be 7.96 in. The hedge lines are approximately the north and south section lines of Section 16, which is regular. The terrain is approximately level.
- \checkmark What is the approximate photo scale in the area between the two hedges?
 - A. 1:663
 - B. 1:24,000
 - C. 1 in. = 663 ft.
 - D. 1 in. = 7,960 ft.




✓ 26. You plan to plot the following traverse on a sheet with dimensions of 18 in.
 wide x 24 in. long.

AB:	S 0° 25' E,	1,380.02 ft.
BC:	N 88°31'W,	2,495.00 ft.
CD:	N 0°25'W,	1,380.02 ft.
DA:	S 88°31' E,	2,495.00 ft.

- ✓ The scale best suited to show maximum detail and to allow for a 1/2-in. margin is:
 - A. 1:1,440
 - B. 1:1,200
 - C. 1:960
 - D. 1:600



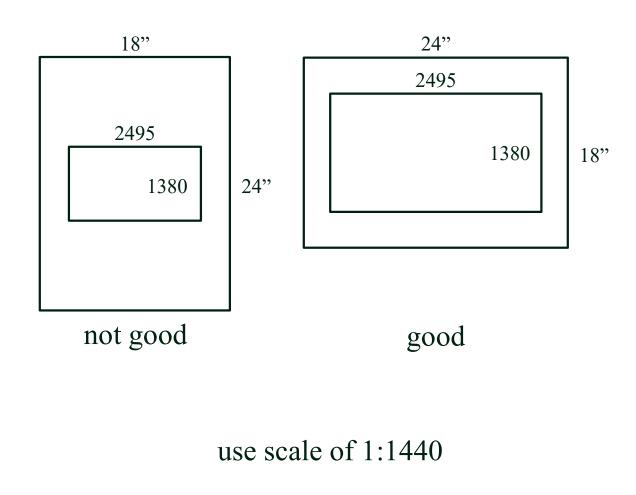

2495 1440	=	1.7	3′	=	21"
2495 1200	_	2.0	8′	=	25"
1380 1440	_	0.9	6′	=	11.5"
1380 1200	—	1.1	5′	=	13.8"
1380 960	_	1.4	4′	= 1	17.25"



✓ 26. You plan to plot the following traverse on a sheet with dimensions of 18 in.
 wide x 24 in. long.

AB:	S 0° 25' E,	1,380.02 ft.
BC:	N 88°31'W,	2,495.00 ft.
CD:	N 0°25'W,	1,380.02 ft.
DA:	S 88°31' E,	2,495.00 ft.

- ✓ The scale best suited to show maximum detail and to allow for a 1/2-in. margin is:
 - A. 1:1,440
 - B. 1:1,200
 - C. 1:960
 - D. 1:600



✓ 26. You plan to plot the following traverse on a sheet with dimensions of 18 in.
 wide x 24 in. long.

AB:	S 0° 25' E,	1,380.02 ft.
BC:	N 88°31'W,	2,495.00 ft.
CD:	N 0°25'W,	1,380.02 ft.
DA:	S 88°31' E,	2,495.00 ft.

- The scale best suited to show maximum detail and to allow for a 1/2-in. margin is:
 - A. 1:1,440
 B. 1:1,200
 C. 1:960
 - D. 1:600



- ✓ 27. The area of a lake is obtained by planimeter as 10 in.² on a map at scale 1:50,000.
- \checkmark The area (sq. mi.) covered by the lake is most nearly:
 - A. 6.23B. 7.89
 - C. 9.47
 - D. 10.00



1:50,000

1 in. = 4,166.67 ft.

1 in. = 0.79 mi.

 $1 \, sq. in. = 0.623 \, sq. mi.$

 $10 \, sq. in. = 6.23 \, sq. mi.$



- ✓ 27. The area of a lake is obtained by planimeter as 10 in.² on a map at scale 1:50,000.
- \checkmark The area (sq. mi.) covered by the lake is most nearly:
 - A. 6.23B. 7.89
 - C. 9.47
 - D. 10.00



- ✓ 27. The area of a lake is obtained by planimeter as 10 in.² on a map at scale 1:50,000.
- \checkmark The area (sq. mi.) covered by the lake is most nearly:
 - A. 6.23B. 7.89C. 9.47
 - D. 10.00



- ✓ 28. On an aerial photograph, the measured distance between two points is 5.134 in. On a 7.5-min topographic map (1:24,000 scale), the measured distance between these same two points is 1.689 in.
- \checkmark The nominal scale ratio of the photo is most nearly:
 - A. 1:658
 - B. 1:7,896
 - C. 1:7,920
 - D. 1:24,000



1:24,000

 $1.689 \cdot 24,000 = 40,536$

 $\frac{40,536}{5.134} = 7,896$

1:7,896



- ✓ 28. On an aerial photograph, the measured distance between two points is 5.134 in. On a 7.5-min topographic map (1:24,000 scale), the measured distance between these same two points is 1.689 in.
- \checkmark The nominal scale ratio of the photo is most nearly:
 - A. 1:658
 - B. 1:7,896
 - C. 1:7,920
 - D. 1:24,000



- ✓ 28. On an aerial photograph, the measured distance between two points is 5.134 in. On a 7.5-min topographic map (1:24,000 scale), the measured distance between these same two points is 1.689 in.
- \checkmark The nominal scale ratio of the photo is most nearly:
 - A. 1:658
 - B. 1:7,896
 - C. 1:7,920
 - D. 1:24,000